




7000 Master Clock Controller

Put everyone on the same page with synchronized timekeeping over multiple departments or work stations. Staff is accountable and punctual, schedules are standardized, productivity is improved, and operations run more efficiently.

The 7000 Master Clock sends a time signal every two minutes to Pyramid analog or digital wall clocks. The 7000 also provides power to up to eight analog clocks (part #5200, 5217N) and 24V DC bells and horns. The system is able to schedule timed signaling to ring bells or sound horns for up to 300 events. Features automatic Daylight Saving Time adjustment.

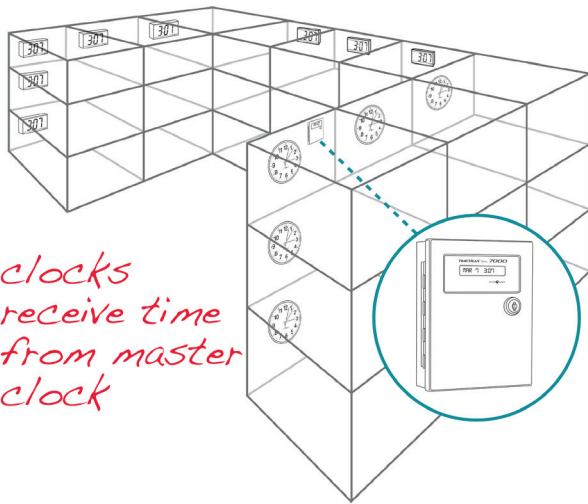

- Synchronizes time across multiple departments or work stations
- Synchronizes up to 200 TimeTrax Sync™ analog and/or digital wired wall clocks
- Signals timed events to ring 24V DC bells or sound horns (7000BLD110 includes bell relay for 110V bells and horns)
- Powers up to 8 TimeTrax Sync Analog Clocks (#5200, 5217N), up to 35 24V DC bells (part #41361, 41392) and up to 20 24V DC horns (part#41362)
- Schedules up to 300 timed bell or horn events
- Automatic Daylight Saving Time adjustment
- Sturdy steel casing

7000 Master Clock Controller Ordering Information

MASTER CLOCK CONTROLLERS	
7000	Master Clock Controller
7000BDL110	Master Clock Controller w/Bell Relay



Model 7000*

*Model 7000BDL110 includes Bell Relay for 110V AC bells and horns. Clocks, bells, and horns sold separately.






7000 Master Clock Controller

SPECIFICATIONS

Part#	7000/7000BDL110
Time Set	Manual
Power Output	1. 24V DC 800mA (bells, horns, relay) 2. 24V DC using RJ45 (powers up to 8 analog clocks, #5200, #5217N)
Power	Power Adaptor 100-240VAC, 50/60 Hz, 24V DC 1.5A
BCD Time Updates	Up to 200 clocks
Operating Temp	-30°F (-34.44°C) to 130°F (54.44°C)
Display	LCD, date & time
Housing	Textured powder coat surface metal
Color	Black
Mounting	Wall Mount
Warranty	1-Year manufacturer's limited warranty
Dimensions	5.5"W x 7.125"H x 1.75"D
Weight	1.81lb
Shipping Weight	4.451lb

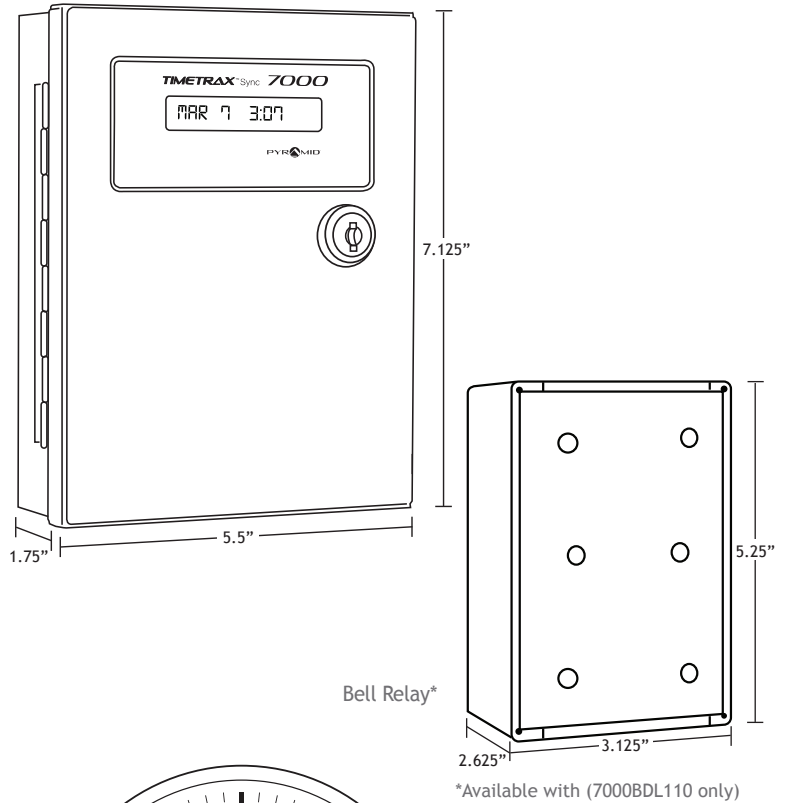

Bell Relay*

*Available with (7000BDL110 only)

BELL RELAY SPECIFICATIONS*


Contact Rating	10A @ 125V AC, 7A @ 250V AC
Color	Putty
Mounting	Wall Mount
Dimensions	3.125"W x 5.25"H x 2.625"D
Weight	.75lb
Shipping Weight	1lb

*Included with 7000BDL110.

ACCESSORIES

DIG-4B	4" x 4-digit Red LED Digital Clock, 6 ft. cord
DIG-6B	4" x 6-digit Red LED Digital Clock, 6 ft. cord
41357G	4" x 4-digit Red LED Digital Clock, free leads
61357G	4" x 6-digit Red LED Digital Clock, free leads
5200	13" Analog Clock 12 Hour Face, free leads
5217N	17" Analog Clock 12 Hour Face, free leads
5300*	Single Zone Bell Ringer
43124	Power Adaptor 100-240VAC, 50/60 Hz, 24V DC 1.5A
41269	RJ45 BCD Cable, 50'
41314	RJ45 BCD Cable, 100'
41270	RJ45 Y-Splitter Cable
41361	6" 24V DC Bell
41392	8" 24V DC Bell
41362	24V DC Horn
41363	110V AC Horn (7000BDL110 ONLY)
41397R	6" 110V AC Bell, red (7000BDL110 ONLY)
41398G	8" 110V AC Bell, grey (7000BDL110 ONLY)
41449	Bell Wire, 100' Spool
41450	Bell Wire, 250' Spool

*Powers up to eight 5200 or 5217N Analog Clocks using RJ45.

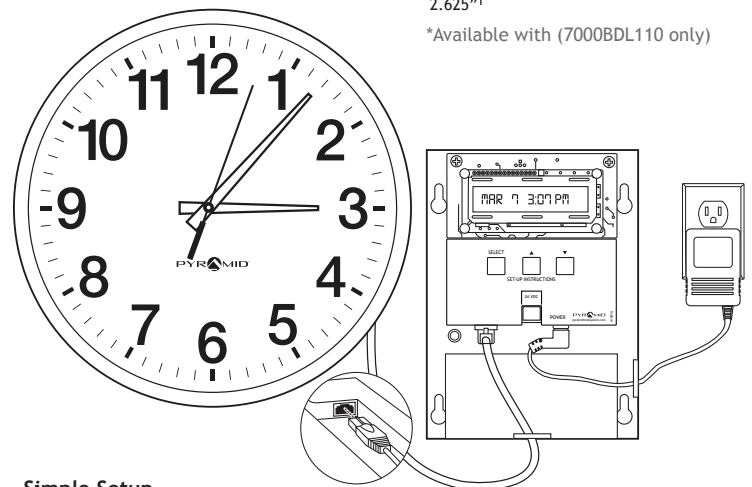

Simple Setup.

Simply plug the Master Clock into a standard electrical outlet and set time. Connect clocks to Master Clock using RJ45 BCD cable, (powers up to 8 analog clocks), then complete electrical installation of clocks. Up to 200 clocks may be added to the system.

*See user guide for bell connection.

